


CB03II Flatbed Digital Cutter

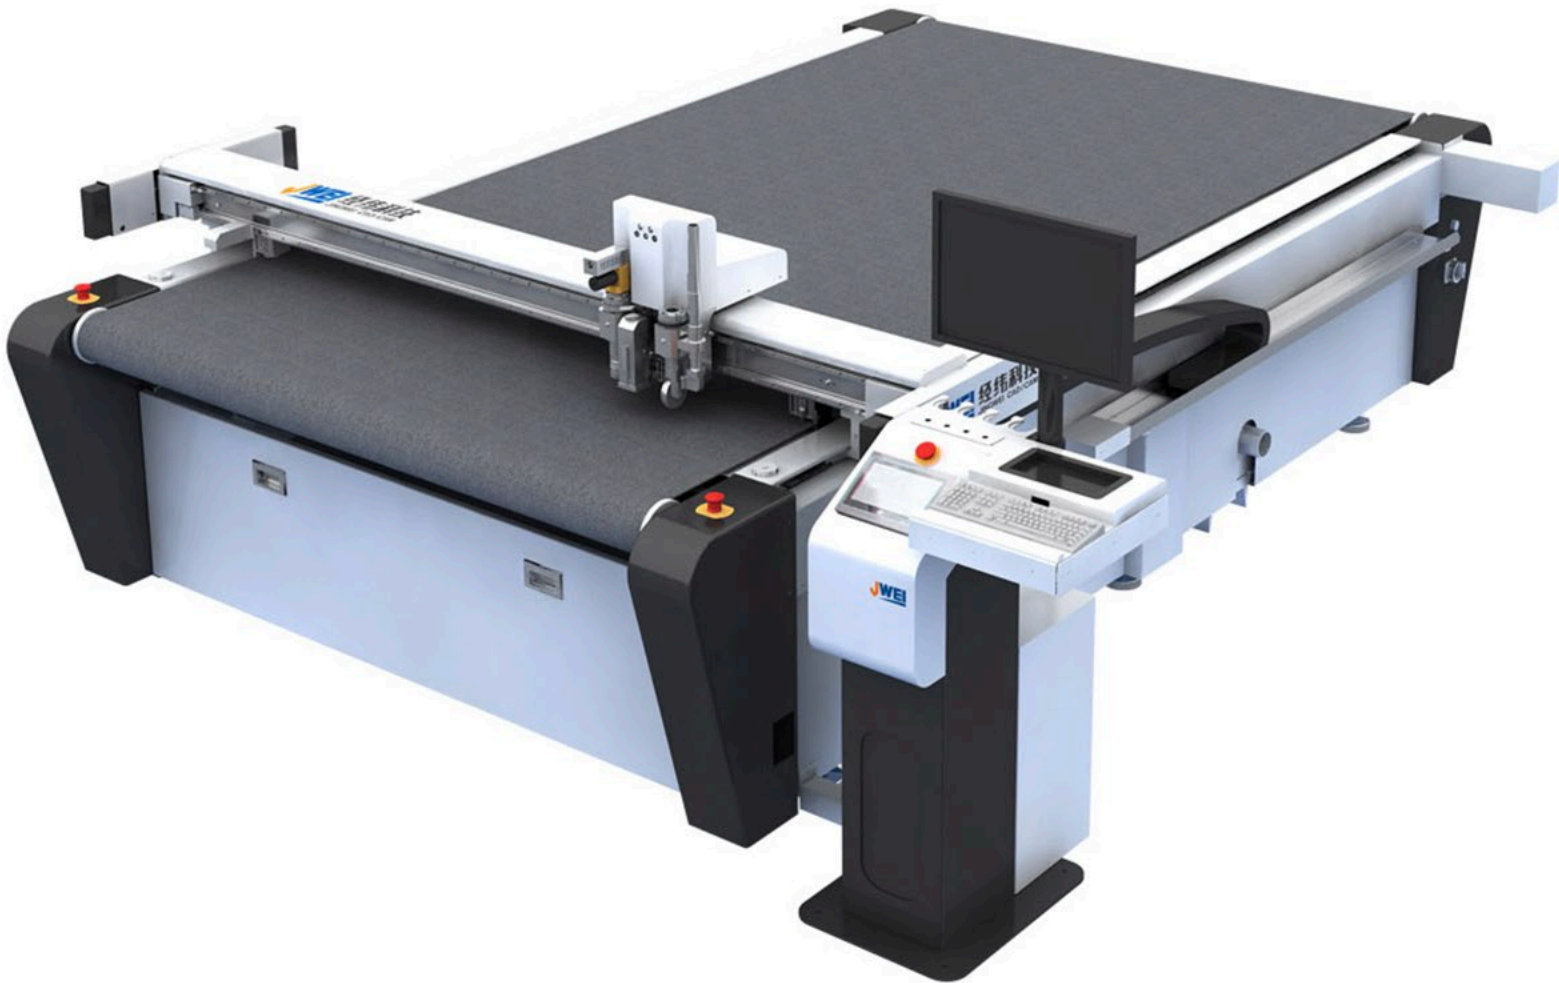

Higher cutting precision, especially for small shapes like small circle.

Upgrade of table and enhanced vacuum suction.

Integrated cable layout, One-whole head guard.

Model No.	CB03II-2513RM CB03II-2516RM CB03II-1113 CB03II-1816RM			
Multifunctional head	Easy to change different tools. Engraving and router. Oscillating thorough cutting/ Kiss cutting/ Creasing/ Plotting/ Laser positioning, and precise camera registration			
Tools	Various kinds of cutting blades, different size of creasing wheels			
Safety device	Infrared sensor, responsive, safe and reliable			
Max. Speed	Up to 1500 mm/s			
Cutting speed	Up to 1200 mm/s (Depends on different materials)			
Cutting thickness	Up to 50mm (Depends on different materials)			
Cutting material	All kinds of corrugated paper, grey cardboard, KT board, PVC expansion sheet, honey comb plate, light slide, PP gum, car sticker, flag fabric, EPE foam, foam, arcylic etc.			
Repeatability	Up to 0.05 mm			
Repeat Precision	Up to 0.01 mm			
Buffer memory	2GB			
Interface	Ethernet port			
Work command	HP-GL compliant format			
Transmission distance	Up to 350m			
Transmission system	Digital servo driver, straight rail, synchronous belt, guide screw			
Numerical control panel	EN LED Touch screen			
Power Supply	AC 380V/220V±10% , 50HZ/60HZ			
Working Environment	Temperature 0-35 degree; Humidity 60% - 80%			
Effective Cutting Area	2500mm*1300mm			
	2500mm*1600mm	1100mm*1300mm	1800mm*1600mm	