

FD30

| Top Grade Digital DTF Printer |



PRECISIONCORE
PRINTHEAD
powered by EPSON

Max Speed
4m²/h

Features and Advantages



CMYK LC LM+W Ink Printing

Original ink, printing bright, high degree of color reduction.




Imported Fluororubber Pinch Rollers

Reduce static and ink misting, ensure printing quality, and reject the outputs of media wrinkles.



White Ink Stirring System

Adopt white ink stirring system to print ink smoothly.

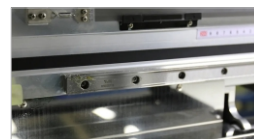

Imported Silent Linear Guide Rail

Smoother operation and longer life.


TECHNICAL PARAMETERS

Model	FD30(double-head)			
Printhead	Type: EPSON F1080-A1		Quantity: 2	
Print Width	300mm			
Print Speed (Tested on linear print without feather)	6PASS	4㎡/h	8PASS	3㎡/h
Ink Type	Pigment Ink			
Print Color	CMYK LC LM+W			
RIP Software	Maintop, FlexiPRINT			
Transmit Port	Ethernet			
Print Media	PET Film			
Image Format	JPG, TIF, PDF, etc.			
System Configuration	WIN7/WIN10, HARD DISK: 500G or more, GPU: ATI Discrete GPU Memory: 8G or more, CPU: Intel i5 Processor			
Working Environment	Temp.: 18℃ ~ 30℃		Humidity: 35% ~ 65%	
Power	220V, 50HZ/60HZ, 10A			
Package Size	1200×650×620mm			
Package Weight	100KG			

*The technical indicators and content of the machines are subject to the actual sales of the machine. The technical parameters and content of this brochure will be changed without further notice. The right of interpretation belongs to the manufacturer.

A3

| Shaking Powder Machine |

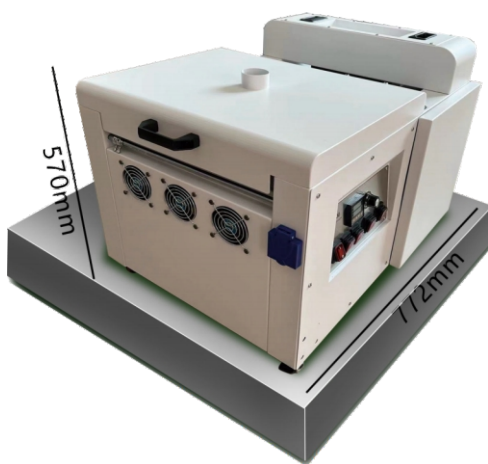

Digital Heat Press
Print Machine




Pigment Ink
CMYK+White



Super-Latex PET
Printable Film



Hot Melt Powder



Shaking and Melting
Powder Machine



Finished Pattern



Heat Pressing



Unique Garments

TECHNICAL PARAMETERS

Model	A3
Print Width	0-330mm
Print Media	PP Paper / PET Film
Control Panel	Automatic/Manual Control, Shaking Powder Speed Control, Dusting Powder Time Control, Curing Temperature Control, Cooling Down Fan Control.
Heating and Drying Function	Far-infrared Carbon Fiber Heating Tube Heating
Take-up Media Function	Automatic Induction Take-up Media
Electrical Parameters	Rated Voltage 220V, Rated Current 10A, Power 3KW
Machine Size	External Size: L930*W660*H570mm Package Size: L800*W584*H695mm
Gross Weight	34/46KG

*The technical indicators and content of the machines are subject to the actual sales of the machine. The technical parameters and content of this brochure will be changed without further notice. The right of interpretation belongs to the manufacturer.